

# bizhub 3320

## **✓** Functionality



- Black & white



Black & whitePCL/PSLocal/Network



ColourBlack & white – Scan-to-eMail – Scan-to-FTP TWAIN Network



– Super G3 Fax – PC-Fax
















## Technology

Emperon™ – print controller	Easily compatible with different users and IT environments through Konica Minolta's unified print technology	X
Simitri® HD – polymerised toner	Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact	X
OpenAPI – solution platform	Server-based applications provide efficient workflows for the entire MFP fleet	×
i-Option – special feature	Offers extended scope and advanced MFP functionality in line with individual requirements	X
CSRC – remote service	Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service	V
IWS – panel customisation	Improved user-device interaction and enhanced productivity through full MFP panel customisation	X

## Option diagram

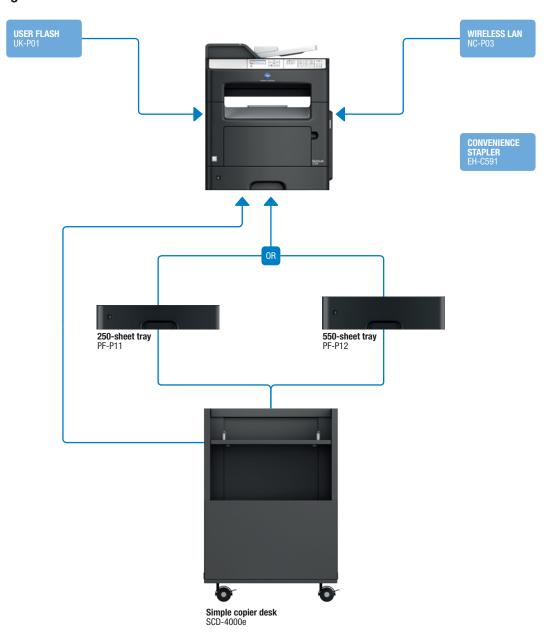

## Finishing functionality



## Descriptions

PF-P11 Paper tray	100 Base-TX Ethernet standard A5–A4; 250 sheets; 60–120 gsm
	60–163 gsm. 256 MB memory and 10 Base-T/
	XPS support. Paper capacity of 250 sheets and 50-sheet manual bypass. Media from A6 to A4 and
bizhub 3320	Communication centre with 33 ppm b/w. Standard print controller with PCL 5/6; PostScript 3; PDF 1.7 and

PF-P12 Paper tray	A5-A4; 550 sheets; 60-120 gsm
SCD-4000e	Ensures ergonomic height and provides storage space
Simple copier desk	for print media, etc.
UK-P01 User flash	256 MB User flash for storing fonts, forms and macros
	or to save job account log
NC-P03 Wireless LAN	Wireless LAN to network connector
EH-C591 Convenience stapler	Convenient stapling of up to 50 prints per set

## Technical specifications

#### SYSTEM SPECIFICATIONS

System memory	256 MB (standard)
Interface	10-Base-T/100-Base-TX Ethernet; USB 2.0
Network protocols	TCP/IP (IPv4 / IPv6); UDP; IPP; TCP; HTTP; HTTPS; SNMP;
	AppleTalk
Automatic	Up to 50 originals; A6-A4; 52-120 gsm
document feeder	
Printable paper size	A6-A4; customised paper sizes
Printable paper weight	60-163 gsm
Paper input capacity	Standard: 300 sheets
	Max.: 850 sheets
Tray 1	250 sheets; A6-A4; 60-90 gsm
Tray 2 (optional)	250/550 sheets; A5-A4; 60-120 gsm
Manual bypass	50 sheets; A6-A4; custom sizes
Automatic duplexing	A4; 60-90 gsm
Output capacity	Max.: 150 sheets
Copy/print volume	Rec.: 3,600 pages
(monthly)	Max.*: 50,000 pages
Toner lifetime	10,000 pages
Imaging unit lifetime	60,000 pages
Power consumption	220-240 V / 50/60 Hz
	Less than 540 W
System dimensions	389 x 472 x 468 mm
(W x D x H)	
System weight	Approx. 20 kg
-	

#### **COPIER SPECIFICATIONS**

Copying process	Electrostatic laser
Copy/print speed A4	Up to 33 ppm
Autoduplex speed A4	Up to 28 ppm
1st copy out time	6.5 sec.
Copy resolution	600 x 600 dpi
Multicopy	1-999
Original format	A6-A4
Magnification	25-400%
Copy functions	Duplex; n-up; page insertion; overlay; electronic sorting

### PRINTER SPECIFICATIONS

Print resolution	1,200 x 1,200 dpi
Page description	PCL 5/6; PostScript 3; PDF v1.7; XPS
language	
Operating systems	Windows VISTA (32/64)
	Windows 7 (32/64)
	Windows 8 (32/64)
	Windows Server 2003 (32/64)
	Windows Server 2008 (32/64)
	Windows Server 2008 R2
	Windows Server 2012
	Windows Server 2012 R2
	Macintosh OS X 10.x
	Linux, Citrix
Printer fonts	89 PCL Latin; 91 PostScript 3 Emulation Latin
Print functions	Duplex; n-up; watermark; cover sheet; electronic sorting;
	secure print

#### SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 42/19 ipm
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-eMail
	Scan-to-FTP
	Network TWAIN scan
File formats	PDF; TIFF; JPEG; XPS

#### **FAX SPECIFICATIONS**

Fax standard	Super G3
Fax transmission	Analogue
Fax resolution	Max.: 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG; JPEG
Fax modem	Up to 33.6 Kbps
Fax destinations	400
Fax functions	Time shift; PC-Fax; up to 500 job programs;
	block Junk Fax banned fax list; fax server

### SYSTEM FEATURES

Security	SNMPv3; IPsec support; TCP/UDP port disabling; IEEE 802.1x support; secure print (print hold/PIN);
	certificate management
Software	PageScope Net Care Device Manager

<sup>\*</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

  Some of the product illustrations contain optional accessories.

  Specifications and accessories are based on the information available at the time of printing and

- are subject to change without notice.

  Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

Cartridge Return Program
Konica Minolta Return Program cartridges are patented print cartridges sold at a discount in exchange for the customer's agreement to the license requirement that the cartridges will be used only once and returned only to manufacturer for remanufacturing or recycling. These patented cartridges are licensed for single use only and will stop working after delivering a fixed amount of toner. Toner may remain in the cartridge when replacement is required. Replacement cartridges sold without these restrictions (non-returnable cartridges) are also available. Please contact a Konica Minolta representative for further details and availability.























